



HERCULAN MAINTENANCE

NEW FLOOR INITIAL MAINTENANCE

Important: Do not allow any use of a new or recoated floor for 5 days after installation. To prevent future dirt build up on the floor, be sure to follow these steps before the floor is open for use.

1. Sweep floor thoroughly with a clean, untreated cotton mop.
2. Mix Herculan GT Multi-cleaner with tap water using a 30 to 1 ratio
3. Damp mop entire floor surface with cleaner / water solution.
4. Allow solution to dry on floor.

This initial maintenance treatment will help your Herculan floor to repel dirt and make cleaning easier.

SPOT REMOVAL

Remove difficult stains and / or scuff marks with a NON-ABRASIVE cleaner. Stronger cleaning agents such as acetone can be used for tar removal. ****Floor must be rinsed with water following the use of solvent. Failure to remove solvent could result in permanent discoloration of floor**** Before using any solvents, test a small area (behind the bleachers for example) to determine best results.

DAILY CLEANING PROCEDURES

1. Sweep daily with a clean, untreated cotton dust mop. Wash mop periodically to remove stubborn dirt. It is important to routinely remove dirt and grit. If allowed to build up, dirt and grit will dull the look of the floor and make long term maintenance more difficult.
2. Spot clean as needed.

WEEKLY CLEANING PROCEDURES


Depending on the frequency of use, surface may require weekly scrubbing.

1. Sweep floor with a clean, untreated dust mop.
2. Mix Herculan GT Multit-cleaner with hot tap water, using a 30 to 1 water to cleaner ratio for typical weekly or monthly maintenance.
3. If floor is extremely dirty, use a 20 to 1 ratio.

Action Floor Systems, LLC

Corporate Headquarters

4781 N US Hwy 51
Mercer, Wisconsin 54547-9708
voice: 715.476.3512
fax: 715.476.3585
e-mail: info@actionfloors.com
web: www.actionfloors.com

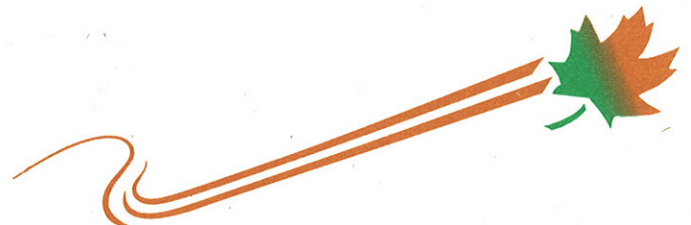



4. Apply water solution to the floor with a soft rotary brush scrubber or an auto scrubber by turning the vacuum off with the squeegee in the up position. Allow solution to stand on the floor for 10-15 minutes to release and loosen dirt, but do not allow cleaner to dry. Slowly scrub with the rotary brush scrubber or auto scrubber, vacuum on the squeegee in the down position, using a white, tan, or tampico scrub pad.
5. Allow floor to dry overnight.

MONTHLY CLEANING

1. Sweep floor with a clean, untreated cotton dust mop.
2. Mix Herculon GT Multit-cleaner with hot tap water, using a 30 to 1 water to cleaner ratio for typical weekly or monthly maintenance.
3. If floor is extremely dirty, use a 20 to 1 ratio.
4. Apply water solution to the floor with a soft rotary brush scrubber or an auto scrubber by turning the vacuum off with the squeegee in the up position. Allow solution to stand on the floor for 10-15 minutes to release and loosen dirt, but do not allow cleaner to dry. Slowly scrub with the rotary brush scrubber or auto scrubber, vacuum on the squeegee in the down position, using a white, tan, or tampico scrub pad.
5. Allow floor to dry overnight.

IMPORTANT

- Keep dust, dirt and grime off the floor. Use floor mats at all entrances to gym and high traffic areas.
- Avoid use of black soled shoes that cause excessive scuffing.
- Tables, chairs and moveable equipment must have proper functioning glides to minimize indentations.
- Don't allow water or liquids to stand on floor
- When using a battery operated auto scrubber, be sure battery acid does not leak on the floor.

Action Floor Systems, LLC

Corporate Headquarters

4781 N US Hwy 51
Mercer, Wisconsin 54547-9708
voice: 715.476.3512
fax: 715.476.3585
e-mail: info@actionfloors.com
web: www.actionfloors.com

